

GP8000

GP SERIES
Commercial/Residential
Portable Generators

A/C Rated Output Watts 8,000
A/C Maximum Output Watts 10,000

Model 5680-0

UPC Number: 696471056808
Emissions Certification: Not for sale in California or Canada.



features

- GENERAC OHVI OVERHEAD VALVE INDUSTRIAL ENGINE WITH FULL PRESSURE LUBRICATION AND SPIN-ON FILTER
- HIGH PERFORMANCE ALTERNATOR
- STEEL FUEL TANK WITH FUEL GAUGE
- LOCKING FOLD-DOWN HANDLES
- NEVER-FLAT WHEEL KIT
- 1.25" HARDENED STEEL TUBE CRADLE
- CIRCUIT BREAKER PROTECTED OUTLETS
- LOW TONE MUFFLER

customer connections

Outlets


A	(4) 5-20R 120V
B	L14-30R Twist-Lock 120/240V

Circuit Breakers

M	(2) 20A
N	(2) 30A

Other Features

H	Hour Meter with Maintenance Reset
----------	-----------------------------------

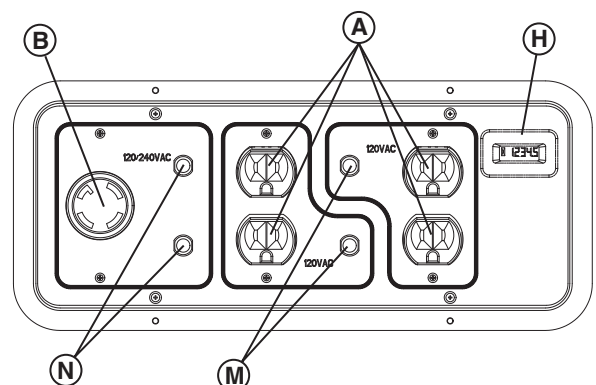

GP8000

specifications

Product Series	GP8000
Model	5680-0
Configuration/Emissions	49-State
A/C Rated Output Watts:	8000
A/C Maximum Output Watts:	10000
A/C Voltage	120/240VAC
A/C Frequency	60 Hz
Rated 120/240 VAC Amperage	33.3
Max 120/240 VAC Amperage	41.7
Engine Displacement	410cc
Engine Type	OHVI
Engine RPM	3600
Recommended Oil	5W30
Lubrication Method	Full Pressure
Choke Type	Manual Lever
Fuel Shut Off	Manual Lever
Idle Control	Full Speed
Starting Method	Manual
Battery	n/a
Battery Size	n/a
Low Oil Shutdown Method	Low Pressure

Start Switch Type	3-Position
Switch Location	On Engine
Single-Point Lifting Eye	N/A
Fuel Gauge	Built-In
Fuel Tank Capacity (Gal)	8
Fuel Tank Capacity (Liters)	30.28
Run Time at 50% (Hours)	8
Cord Set	No
Handle Style	Folding Interlocked
Wheel type	9.5" Solid Wheels
Maintenance Kit	Sold Separately
Warranty - Residential	2 Year
Warranty - Commercial	1 Year

dimensions and weights

Length (L)	33.5
Width (W)	26.5
Height (H)	27.5
Extended Length (EL)	47
Carton Length	35.5
Carton Width	26.5
Carton Height	27.5
Unit Weight (lbs)	187
Shipping Weight (lbs)	200

